


## COLUMNA DE RETENCIÓN INTERMEDIA (GUIDE PILLAR CENTRE LOCKING WITH RING)

### 5221

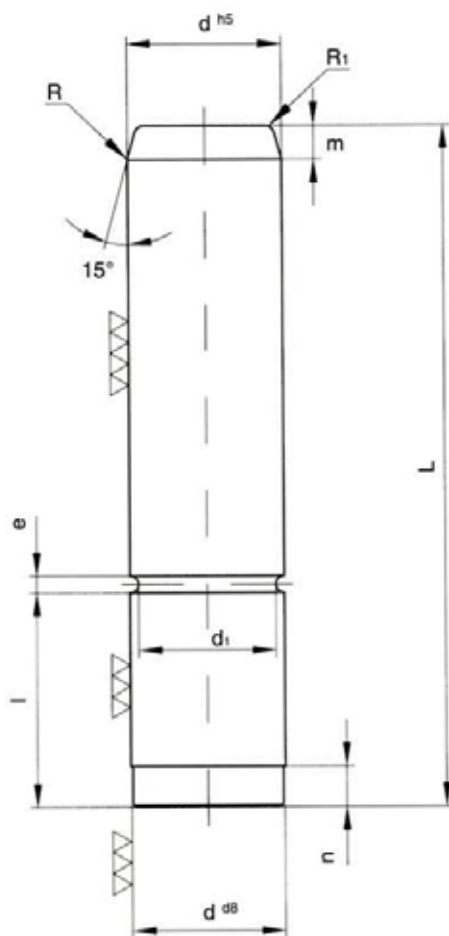

**MATERIAL:** Acero de cementación  
**DUREZA:** 62 ± 2 HRc  
**AGUJ. DE ALOJAMIENTO:** Tolerancia M6

**MATERIAL:** Hardened steel  
**HARDNESS:** 62 ± 2 HRc  
**LODGING HOLE:** Tolerance M6

\* Otras medidas se fabrican bajo pedido  
 \* Other sizes on request

d	25	32	40	50	63	80	100
d1	22,3	27,8	35,8	45,8	56,8	73,8	93,8
m	8	10	12	16	16	16	16
n	8	12	12	12	18	18	18
e	2,7	4,2	4,2	4,2	6,2	6,2	6,2
l	25	32	63	80	100	125	160
R	12,5	16	20	25	31,5	40	50
R1	2	2	3	3	5	5	5

L	125	140	160	180	200	220	235	250	280	315	355	400	450	500
125	■													
140		■												
160			■											
180				■										
200					■									
220						■								
235							■							
250								■						
280									■					
315										■				
355											■			
400												■		
450													■	
500														■