


PASADORES CILÍNDRICO din-6325 PASADORES CILÍNDRICO CON ROSCA INTERIOR din-7979


MATERIAL:
BO-1 (1.2510)
DUREZA:
60 ±2HRC
FORMA DE PEDIDO:
D x L₁

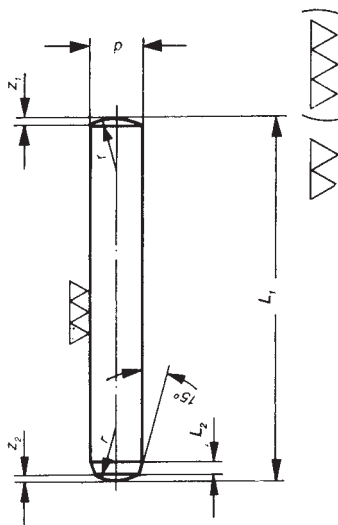

dm ₆	2	2,5	3	4	5	6	7	8	9	10	12	14	16	18	20
L ₂	0,60	0,70	0,80	1,0	1,2	1,5	1,6	1,8	1,8	2,0	2,4	2,7	3,0	3,5	4,0
r	2,5	3,0	4,0	4,0	6,0	6,0	8,0	10,0	10,0	10,0	14,0	16,0	16,0	18,0	20,0
z ₁	0,21	0,25	0,30	0,53	0,55	0,80	0,80	0,80	0,80	1,40	1,40	1,80	2,20	2,40	2,70
z ₂	0,15	0,19	0,23	0,40	0,45	0,60	0,62	0,64	0,75	1,0	1,1	1,2	1,2	1,7	2,0
L1 j14	6														
	8														
	10														
	12														
	14														
	16														
	18														
	20														
	24														
	28														
	30														
	32														
	36														
	40														
	45														
50															
55															
60															
70															
80															
90															
100															
120															
130															
140															
150															

PRECISIÓN:
DIN 7979/ISO 8735

MATERIAL:
BO-1 (1.2510)
DUREZA:
60 ±2HRC
FORMA DE PEDIDO:
D x L₁

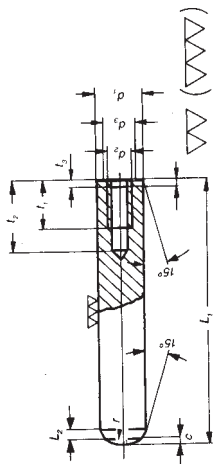

d ₁ m ₆	5	6	8	10	12	14	16	18	20
d ₂	M3	M4	M5	M6	M6	M8	M8	M10	M10
d ₃	3,3	4,3	5,3	6,3	6,3	8,3	8,3	10,3	10,3
t ₁	6	6	8	10	12	12	16	20	20
t ₂	10	10	13	16	18	18	23	27	27
t ₃	0,5	1	1,2	1,2	1,2	1,2	1,6	1,6	1,6
C. máx.	0,6	0,9	1,2	1,5	1,8	2	2,5	3	3
r	5	6	10	10	14	16	16	20	20
L ₂	0,8	1,0	1,0	1,2	1,5	1,5	2,0	2,0	2,0
L1 j14	16								
	18								
	20								
	24								
	28								
	30								
	32								
	36								
	40								
	45								
	50								
	55								
60									
70									
80									
90									
100									
120									